

# PANELS

## TEC RANGE


TEC electro-welded mesh machinery protection guard have 15x15x105mm mesh and 3mm thread.  
Frames come in two sizes:



TEC protection guards are employed to safeguard plants and machinery whose distance from danger area must be equal or above 100 mm.

The panel provides a standard fixing hole for captive screws and other accessories.

250 400 700 800 1000 1200 (mm)

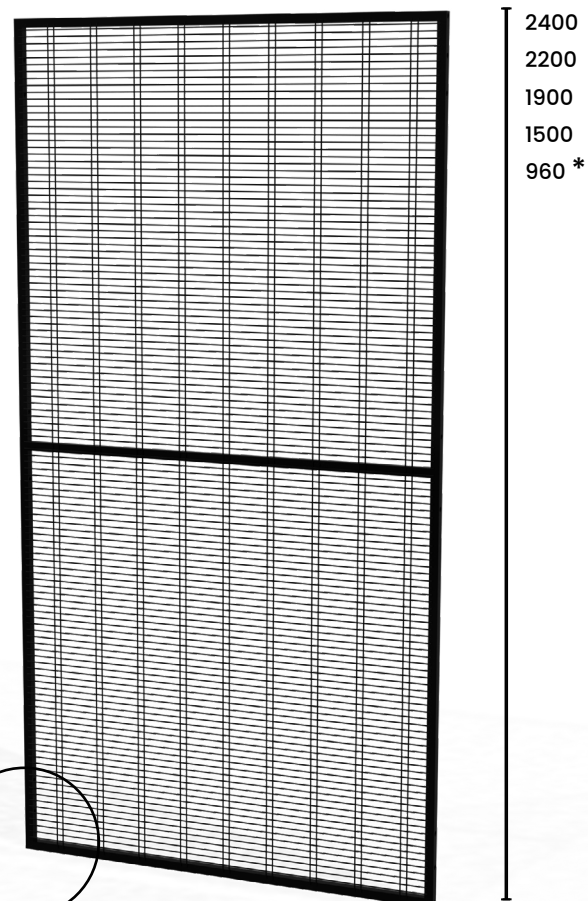


MESH: 15x15x105mm 3mm thread

### COMPATIBILITY

Panel fixing system - META posts and VITERIA posts

### COLOURS (RAL)

Panels undergo epoxy coating



Other colours upon request

\* For guards at a height lower than 1400 mm, extra safety measures apply as required by UNI EN ISO 13857 standard.

## CODE STRUCTURE

VFPA. RE TC 20 .0250 0960

① ② ③ ④

①	<b>PANEL</b>
TC	TEC Range
②	<b>FRAME SECTION (mm)</b>
20	20x20
30	30x30
③	<b>BASE (mm)</b>
250   400   700   800   1000   1200	
④	<b>HEIGHT (mm)</b>
960   1500   1900   2200   2400	

### ISO 14120

Statement of conformity TÜV Nord : DM - 124554-17  
in combination with META posts

Self-certification  
in combination with VITERIA posts

### ISO 3834-3

Welding 3834-3 ICIM : 3834-100009-00

### Impact test UNI EN ISO 14120



**Access Protection guards** have passed the dynamic resistance test from impacts outside the danger area. Test was performed using the PENDULUM TEST procedure as required by **UNI EN ISO 14120** standard.