SLIDING DOOR

UPPER BINARY SINGLE OPENING

The upper binary single opening sliding door, featuring an extra-strong aluminum rail fitted to the posts with special quills can be built using any of Accessafe framed panels. This door can be pre-assembled in the factory or ordered as Door in a Box. Accessories and posts for assembly are supplied whereas the door panels need to be purchased separately. All doors are provided with floor fixing plugs and captive bolts as per UNI EN ISO14120



BASE, TUBULAR AND FLOOR FITTING

ADJUSTABLE BASE

WELDED BASE




60x60 ^{4 M8} galvanized steel mechanic plugs Height setting 25mm


40x40 ^{2 M8} galvanized steel mechanic plugs

40x40 ^{2 M8} galvanized steel mechanic plugs

PLATE SIZE: 192x100mm







80x80 ^{4 M8} galvanized steel mechanic plugs Height setting 40mm PLATE SIZE: 200x200mm

60x60 ^{4 M8} galvanized steel mechanic plugs PLATE SIZE: 192x100mm

Height setting 18mm PLATE SIZE: 35x155mm

80x80 ^{4 M8} galvanized steel

80x80 ^{4 M8} galvanized stee mechanic plugs PLATE SIZE: 200x200mm Height setting 25mm PLATE SIZE: 200x200mm

COMPATIBILITY

Doors are compatible with guard systems built with framed panels and META or VITERIA posts


COLOURS (RAL) All doors undergo epoxy coating process.



Other colours upon request.

accessafe We build safety

LOCKS



GAMMA


High quality lock with aluminum housing and stainless steel mechanism. It is supplied with a set of 2 anodized aluminum handles. Key lock is available upon request.

COMPATIBILITY: DEDICATED PANELS IN 30mm TUBULAR



LATCH Brass mechanic groove and tongue lock

COMPATIBILITY: ALL FRAMED PANELS




NEUTRAL

Lock-free system for optional fitting of accessories such as a safety push bar or safety electronic locks

COMPATIBILITY: ALL FRAMED PANELS

CODE STRUCTURE

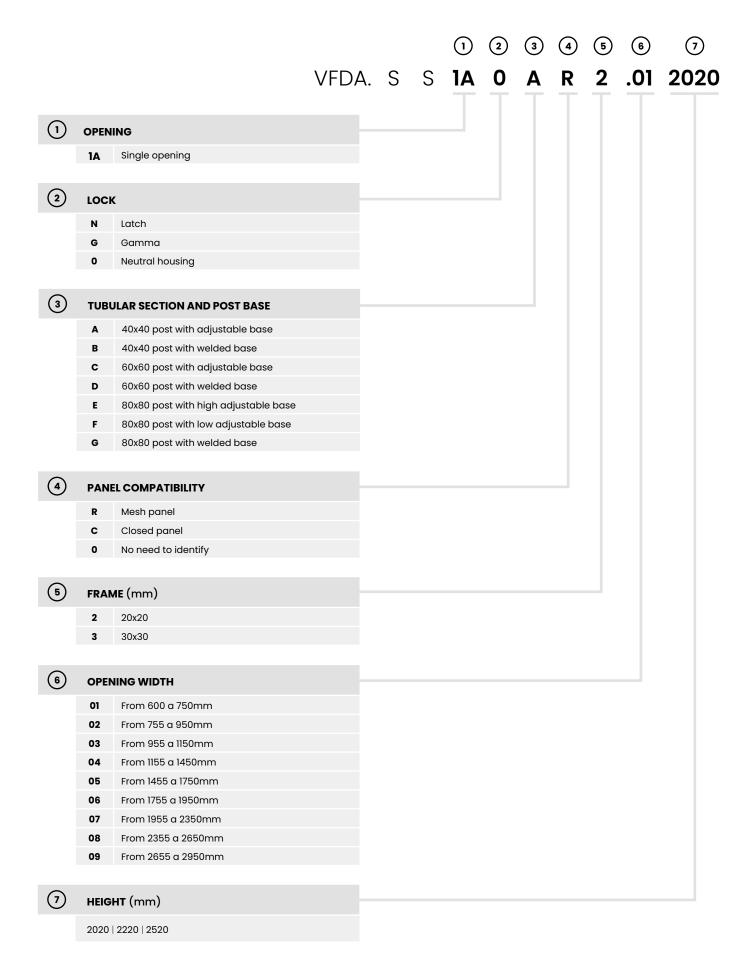

IIII a c c e s s a f e