



COMPOSITE PANELS

POLYLAM RANGE



PolyLam machinery safety guards are composed by 1mm metal sheet for the lower part and 4mm polycarbonate riveted to the frame for the upper part. Frames come in two sizes:



These guards are employed when the danger area is close and prevention from dust, sparks or liquid leaks is needed yet visibility within danger area is guaranteed. Distance from danger area can be as little as 0mm.

The panel is provided with a standard hole to house toughening captive fixing screws and other accessories.

METAL SHEET THICKNESS: 1mm
POLYCARBONATE THICKNESS: 4mm

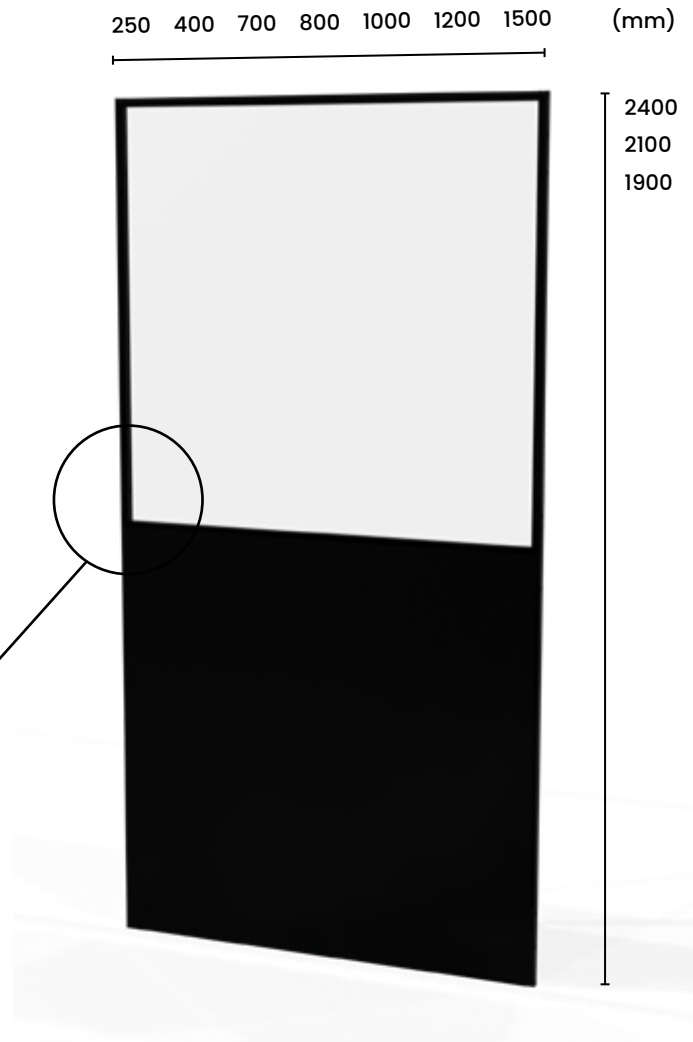

COMPATIBILITY

Panel fixing system - META posts and VITERIA posts

COLOURS (RAL)

Panels undergo epoxy coating



Other colours upon request

CODE STRUCTURE

VFPA. ^① **PL** ^② **04** ^③ **20** ^④ **.0250** ^⑤ **1900**

①	PANEL	
	PL	PolyLam Range
②	POLYCARBONATE THICKNESS	
	04	4mm
③	FRAME SECTION (mm)	
	20	20x20
	30	30x30
④	BASE (mm)	
		250 400 700 800 1000 1200 1500
⑤	HEIGHT (mm)	
		1900 2100 2400

ISO 14120

Statement of conformity TÜV Nord : DM - 124554-17
in combination with META posts

Self-certification
in combination with VITERIA posts

Impact test UNI EN ISO 14120



Accessafe Protection guards have passed the dynamic resistance test from impacts outside the danger area. Test was performed using the PENDULUM TEST procedure as required by UNI EN ISO 14120 standard.